

MODIFICATION PROPOSAL FORM

MPID 245 HOUSEKEEPING – FREQUENCY RESPONSE

FORM GC1, PROPOSAL OF MODIFICATION TO GRID CODE.



160 SHELBOURNE ROAD
 BALLSBRIDGE
 DUBLIN 4
 PH: +353-1-677 1700
 FAX: +353-1-6615375
 EMAIL: GRIDCODE@EIRGRID.COM

MODIFICATION PROPOSAL ORIGINATOR:	EirGrid		
MODIFICATION PROPOSAL ORIGINATOR (CONTACT NAME)	David Cashman	MODIFICATION PROPOSAL ORIGINATOR FAX NUMBER:	
MODIFICATION PROPOSAL ORIGINATOR TELEPHONE NUMBER:	01-2370122	DATE:	18/11/13
MODIFICATION PROPOSAL ORIGINATOR E-MAIL ADDRESS:	david.cashman@eirgrid.com	MODIFICATION PROPOSAL NUMBER (EIRGRID USE ONLY)	MPID245
GRID CODE SECTION(S) AFFECTED BY PROPOSAL:	WFPS1.5.3.2, WFPS1.5.3.7		
GRID CODE VERSION :	5.0		
MODIFICATION PROPOSAL DESCRIPTION (MUST CLEARLY STATE THE DESIRED AMENDMENT, ALL TEXT/FORMULA CHANGES TO THE GRID CODE. THE REQUIRED REASON FOR THE MODIFICATION MUST STATED. ATTACH ANY FURTHER INFORMATION IF NECESSARY.)	Following a review of the modifications approved for WFPS capabilities there were some queries from industry regarding interpretation of the new standards. A review of the clauses has highlighted a number of housekeeping items that require amendments. This modification deals with the clarification of Figure WFPS1.2 which illustrates the Power-Frequency response expected from WFPS. The new diagram aims to clarify the interpretation of the new standards. Also text modifications in relation to WFPS1.5.3.1 and Table WFPS1.2 have been made.		
IMPLICATION OF NOT IMPLEMENTING THE MODIFICATION	The current diagram in Figure WFPS1.2 has caused confusion in the industry with the interpretation of the new WFPS standards for Power-Frequency response. This modification aims to update this figure with a view to removing the ambiguity,		
<i>Please submit the Modification Proposal by fax, post or electronically, using the information supplied above</i>			
EIRGRID REVIEWER			

EIRGRID ASSESSMENT	
--------------------	--

WFPS1.5.3 FREQUENCY RESPONSE

WFPS1.5.3.1 In **Wind Following Mode**, the **Frequency Response System** shall have the capabilities as displayed in the *Power-Frequency Response Curve* in *Figures WFPS1.2*, where the power and frequency ranges required for points A, B, C, D, E are defined below in *Table WFPS1.1* and *Table WFPS1.2*. The **Frequency Response System** shall adjust the **Active Power** output of the **Controllable WFPS** according to a **Governor Droop**, settable by the **TSO** in a range from 2% to 10% and defaulting to 4%, when operating in the ranges outside the deadband range F_B - F_C in the *Power-Frequency Response Curve*. **Controllable WFPS Frequency Response** and **Governor Droop** shall be calculated with respect to **Registered Capacity**. ~~A Controllable WFPS can only give a low frequency response if the Active Power Control Setpoint is less than the Available Active Power.~~

WFPS1.5.3.2 When in **Active Power Control Mode**, the **Controllable WFPS** shall always operate in **Frequency Sensitive Mode** with a **Governor Droop** as set out in WFPS1.5.3.1 and with a deadband of +/-15mHz, or as otherwise agreed with the **TSO**.

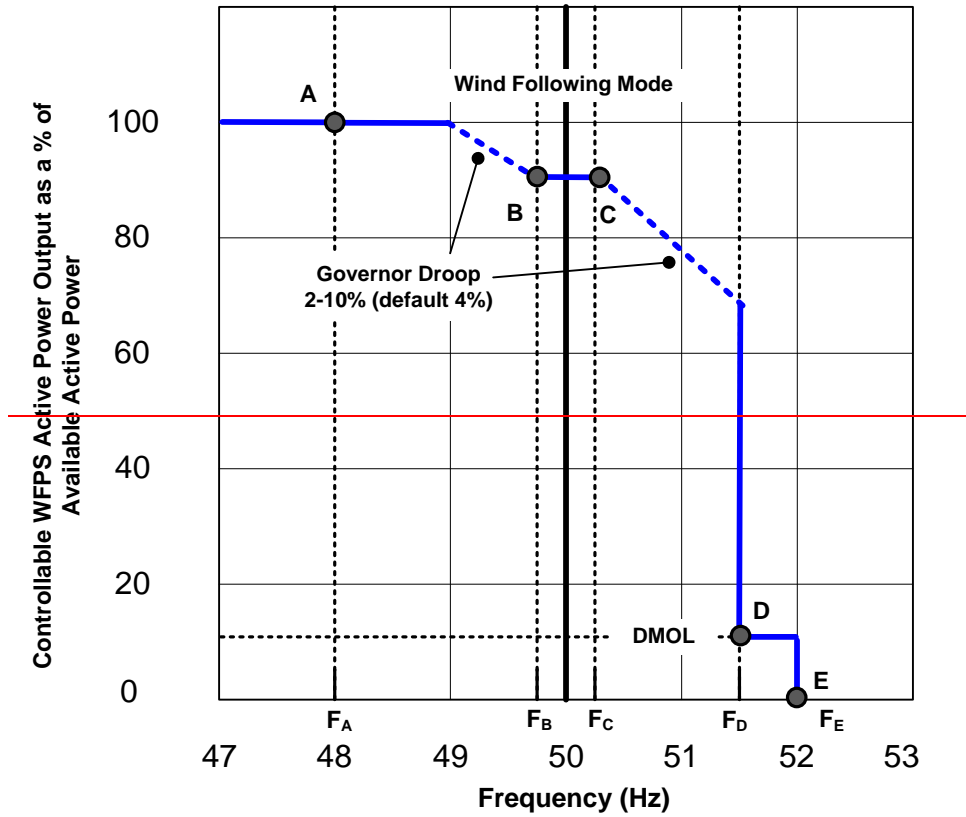


Figure WFPS1.2—Example of Power-Frequency Response Curve for *Wind Following Mode*

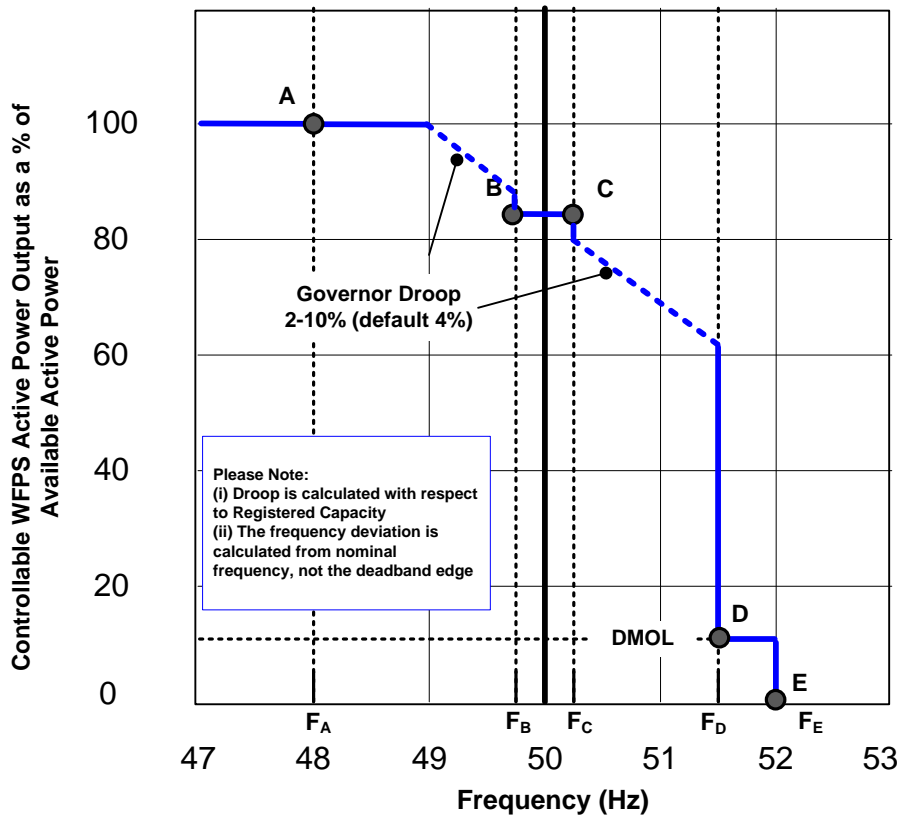


Figure WFPS1.2 – Example of Power-Frequency Response Curve for Wind Following Mode

- WFPS1.5.3.3 When acting to control **Transmission System Frequency**, the **Controllable WFPS** shall provide at least 60% of its expected additional **Active Power** response within 5 seconds, and 100% of its expected additional **Active Power** response within 15 seconds of the start of the **Transmission System Frequency** excursion outside the range F_B - F_C , or in the case of a **Controllable WFPS** in **Active Power Dispatch Mode**, when the **Transmission System Frequency** goes outside the deadband set out in WFPS1.5.3.2.
- WFPS1.5.3.4 When the **Transmission System Frequency** is in the range F_C - F_D , the **Controllable WFPS** shall ensure that its **Active Power Output** does not increase beyond the **Active Power** value of the **Controllable WFPS** when the **Transmission System Frequency** first exceeded F_C , due to an increase in **Available Active Power** in that period.
- WFPS1.5.3.5 If the **Frequency** drops below F_A , then the **Frequency Response System** shall act to maximise the **Active Power** output of the **Controllable WFPS**, irrespective of the **Governor Droop Setting**. If the **Frequency** rises above F_D , then the **Frequency Response System** shall act to reduce the **Active Power** output of the **Controllable WFPS** to its **DMOL** value. If the **Frequency** rises above F_E , then the **Frequency Response System** shall act to reduce the **Active Power** output of the **Controllable WFPS** to zero. Any **WTG** which has disconnected shall be brought back on load as fast as technically feasible, provided the **Transmission System Frequency** has fallen below 50.2 Hz.
- WFPS1.5.3.6 Points 'A', 'B', 'C', 'D' and 'E' shall depend on a combination of the **Transmission System Frequency**, **Active Power** and **Active Power Control Set-point** settings. These settings may be different for each **Controllable WFPS** depending on system conditions and **Controllable WFPS** location. These settings are defined in *Table WFPS1.1* below.

Point	Transmission System Frequency (Hz)	Controllable WFPS Active Power Output (% of Available Active Power)
A	F_A	P_A
B	F_B	Minimum of : P_B or Active Power Control Set-point (converted to a % of Available Active Power)

C	F_C	Minimum of: P_C or Active Power Control Set-point (converted to a % of Available Active Power)
D	F_D	Minimum of: P_D or Active Power Control Set-point (converted to a % of Available Active Power)
E	F_E	$P_E = 0\%$

Table WFPS1.1: **Transmission System Frequency and % Available Active Power Settings for the Points 'A', 'B', 'C', 'D' and 'E' illustrated in Figure WFPS1.2**

Two settings for each of $F_A, F_B, F_C, F_D, F_E, P_A, P_B, P_C, P_D$ and P_E shall be specified by the TSO at least 120 **Business Days** prior to the **Controllable WFPS's** scheduled **Operational Date** (refer to WFPS1.5.3.11 below). The **Controllable WFPS** shall be responsible for implementing the appropriate settings during **Commissioning**.

WFPS1.5.3.7 The table below, *Table WFPS1.2*, shows the **Transmission System Frequency and Active Power** ranges for $F_A, F_B, F_C, F_D, F_E, P_A, P_B, P_C, P_D$ and P_E .

	Transmission System Frequency (Hz)		Available Active Power (%)
			Registered Capacity ≥ 5 MW
F_A	47.0-49.5	P_A	50-100
F_B	49.5-50	P_B	15-100
F_C	50-50.5	P_C	
F_D	50.5-52.0	P_D	15-100 but not less than DMOL
F_E		P_E	0

Table WFPS1.2: **Transmission System Frequency & Active Power ranges appropriate to Figure WFPS1.2.**

For the **Transmission System Frequency** values in *Table WFPS1.2* above, $F_A \leq F_B \leq F_C \leq F_D = F_E \leq F_E$.

